

## WD-18CW-P1 SINGLE ROLLER DOOR TROLLEY DISHWASHER PIT MOUNTED MODEL

### STANDARD FEATURES:

- Single roller door trolley washer
- Pit mounted trolley washers suitable for new installations
- 30-40 wash cycles per hour
- 6 litres per cycle cold water consumption
- 200 litre wash tank volume
- 6 levels of wash cycle for varying types of soiled product
- Maximum 250kg load capacity
- 2.2kW wash pump with 12kW booster heater
- Standard trolley size suitable W 1070mm x D 1030mm x H 1850mm
- Loading and unloading is performed at the same level as the floor
- Suitable for narrow space installation
- Mounting frame and cover plates included
- Recess in the floor must be 200mm deep

### TECHNICAL INFORMATION:

#### Dimensions

Width: 2485mm  
Depth: 1975mm  
Height: 2638mm

#### Water

Hot water temperature: 50-70°C  
Hot water connection: R ¾"  
Hot water pressure: 100-600kPa  
Cold water temperature: 5-12°C  
Cold water connection: R ¾"  
Cold water pressure: 300kPa  
Flow: 30 litres per minute  
Water quality (Hardness): 2-7odH


#### Waste

Connection: 50mm dia direct

#### Electrical

3P+N+E 400-415V 50/60Hz  
52.5kW 80A  
with steam heated option  
3P+N+E 400-415V 50/60Hz  
4.5kW 20A

*Refer operator manual for complete installation instructions*

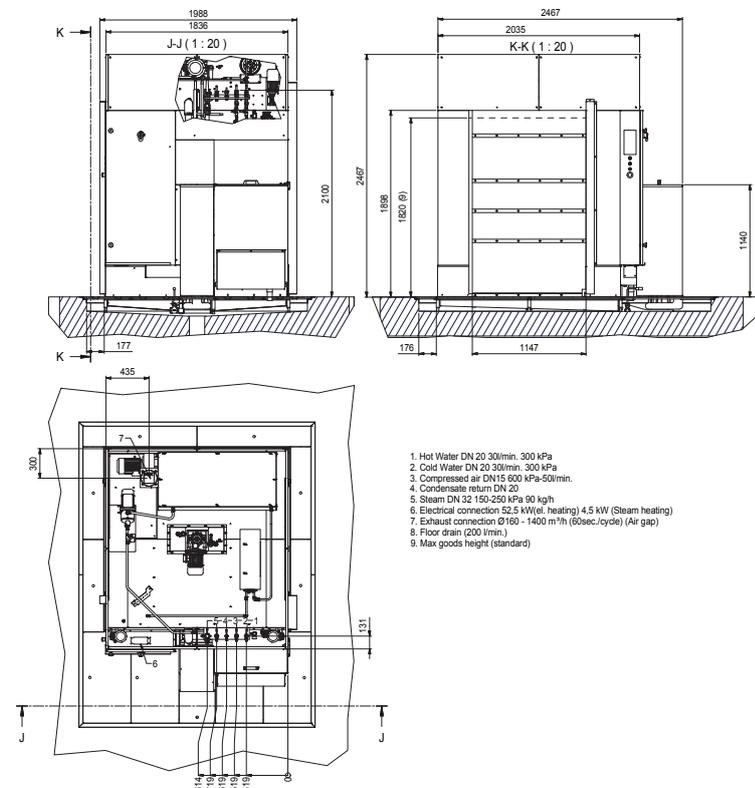

### Australia

[moffat.com.au](http://moffat.com.au)

Moffat Pty Limited  
740 Springvale Road  
Mulgrave  
Victoria 3170  
Australia  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

### New Zealand

[moffat.co.nz](http://moffat.co.nz)

Moffat Limited  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
New Zealand  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.